

P 8 G3



Audio Service


MAXIMUM ÇIKIŞ

Input: 90 dB


MAXIMUM KAZANÇ

Input: 50 dB

IEC 60118-7:2005¹⁾ ANSI S3.22-2009¹⁾

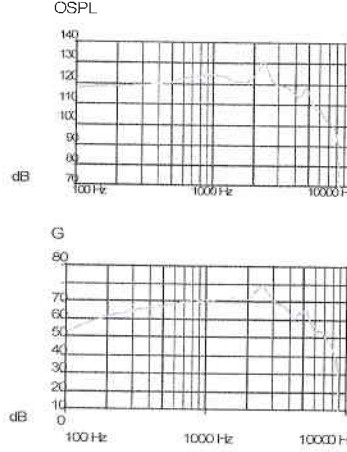

IEC 60118-0²⁾

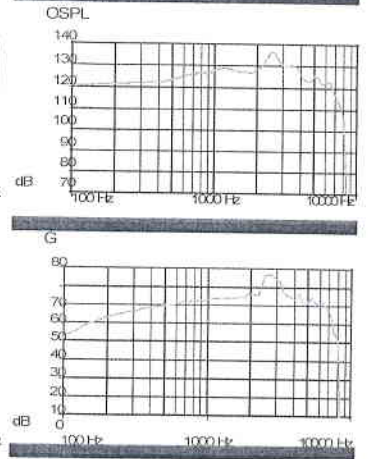

TEKNİK BİLGİLER

MAXIMUM ÇIKIŞ

Peak value at 90 dB

131 dB

137 dB

1,600 Hz (RTF)

122 dB

127 dB

HFA (High Frequency Average)

124 dB

127 dB

TAM KAZANÇ

Peak value at 50 dB

70 dB

77 dB

1,600 Hz (RTF)

58 dB

64 dB

HFA (High Frequency Average)

62 dB

63 dB

Reference test gain

48 dB

57 dB

TEKNİK ÖZELLİKLER

Battery type

13

13

Battery life in hours

185

185

Frequency range

100 – 7,000 Hz

130 – 7,200 Hz

Battery current consumption

1.10 mA

1.10 mA

Equivalent noise level

19 dB

19 dB

Tinnitus noiser broadband

80 dB

Telecoil sensitivity (1 mA/m)

93 dB

98 dB

Distortion
500 Hz
800 Hz
1,600 Hz

2%

2%

1%

2%

2%

1%

¹⁾Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 cm coupler

²⁾Technical data measured in accordance with IEC 60118-0 at ear simulator

Connex 7.5 and AudioFit 7.5 yada üstü program ile programlanabilir.

terceme edilmek üzere bana verilen ...
dilineki ASII/Fotokopi/faks beldevi
...Terceme diline tam ve doğru olarak
çevirdiğimiz beyan ederim.

